

TECHNICAL DATA

# Fluke 283 FC/PV True-RMS CAT III 1500 V Solar Digital Multimeter and Wireless Current Clamp



**MEASURE SAFELY**

CAT III 1500 V/CAT IV 1000 V rated 283 FC Digital Multimeter, a283 FC Wireless Current Clamp, TL175-HV Silicone Test Leads, and CAT III 1500 V rated Staubli MC4 Test Leads

**TRUE-RMS WIRELESS CURRENT CLAMP**

Measures both AC and DC current up to 60 A with a thin jaw design making it easy access to combiner boxes and tight spaces

**MORE FUNCTIONS, MORE SAFEGUARDS**

AC/DC volts, AC/DC mV, AC/DC VA, Continuity, Resistance, Capacitance, AC/DC amps, Hz, visual and audio polarity, user-defined limit gauge, and meter readiness self-check

**Unmatched safety and convenience for solar professionals**

The CAT III 1500 V/CAT IV 1000 V True-RMS Fluke 283 FC Digital Multimeter and a283 FC True-RMS Wireless Current Clamp set the new standard for technicians in DC environments up to 1500 V. Whether you're working with a utility-scale solar photovoltaic (PV) array, wind power, an electric railway, or a data center, the Fluke 283 FC has been engineered to enhance safety and increase productivity while giving you accurate, reliable, and repeatable results.

The 283 FC/PV includes CAT III 1500 V DC safety-rated accessories so you can work confidently in higher voltage environments without compromising safety. Staubli MC4 test leads allow you to quickly make reliable, secure connections to modules or strings to test DC voltage up to 1500 V DC. TL175-HV CAT III 1500 V/CAT IV 1000 V rated silicone TwistGuard™ test leads give you more flexibility when testing voltage, millivoltage, resistance, continuity, or capacitance on inverters, combiner boxes, PV arrays, or individual PV modules. A bright backlit LCD screen and illuminated keypad make it easier to work in both direct and low light conditions. The included magnetic hanging kit frees up your hands and the custom hard carrying case protects your investment while you transport it.


**Additional features:**

- Highly accurate voltage measurements for precise frontline troubleshooting
- Current measurements up to 60 A AC/DC for safely troubleshooting individual strings with of modules with greater accuracy (when using a283 FC wireless current clamp)
- Visual and audio polarity indicators with on/off function help prevent accidental module wiring issues
- User-defined limit gauge helps you make quick go/no-go troubleshooting decisions
- Unique multimeter readiness self-check helps ensure your meter is ready to test
- Save and log measurements to internal memory and view them on your mobile device via Fluke Connect™

### CAT III 1500 V/CAT IV 1000 V Safety Rated

CAT III 1500 V DC systems are now a standard in utility scale PV systems, offering significant cost savings and efficiency improvements to facility owners. These systems operate at higher voltage levels, allowing each inverter to handle more energy, enable longer strings of connected panels, and reduce the need for additional wiring and inverters. Consequently, standard CAT IV inverter outputs of 800 V AC or higher are more prevalent, making it crucial to prioritize safety and accuracy in measurements.

The CAT III 1500 V/CAT IV 1000 V rated 283 FC multimeter and a283 FC wireless current clamp meet the safety requirements for test equipment (IEC 61010-2-032) corresponding to the overvoltage category level of the PV array electrical installation (IEC 61730-1). Combine these with CAT III 1500 V/CAT IV 1000 V rated TL175-HV Premium Silicone Test Leads, CAT III 1500 V MC4 connectors and you've got a comprehensive frontline troubleshooting solution that offers safe and accurate voltage measurement for troubleshooting everything from the inverters, combiners, strings of modules, or individual modules.

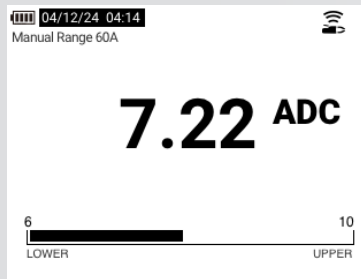

Limit gauge - within range



Limit gauge - outside of range

### User-Defined Limit Gauge


On large-scale PV projects where you're taking repetitive measurements and expect consistent results, the user-defined limit gauge becomes a vital time-saving tool. The adjustable limit gauge can trigger audio and visual indications whenever a measurement falls outside your expected range. This saves you time letting you quickly evaluate measurement results, increasing your confidence in the system's performance, and helping to identify potential issues that need to be addressed.

With the dedicated limit gauge button, you can easily turn the limit gauge warnings on and off, set up new measurement parameters, or select from previously used parameter profiles. This customization streamlines troubleshooting, allowing you to quickly identify measurement deviations or errors, and helps maintain optimum solar installation performance.

### Unique Multimeter Readiness Self-Check

The size and location of utility-scale solar sites can present unique challenges whether they're logistical, environmental, or testing related. Because of that, you want to have confidence that your meter is fully functional, capturing the right data every time so you don't have to do the same job twice. The 283 FC features a unique integrated multimeter readiness self-check, that ensures your meter is in proper working order before you take your next reading. This quick self-check is an additional readiness test that gives you valuable insight to the status of your meter's calibration, battery life availability, test lead functionality, and AC/DC voltage measurement functionality so you can be confident that your meter is ready to work when you are.



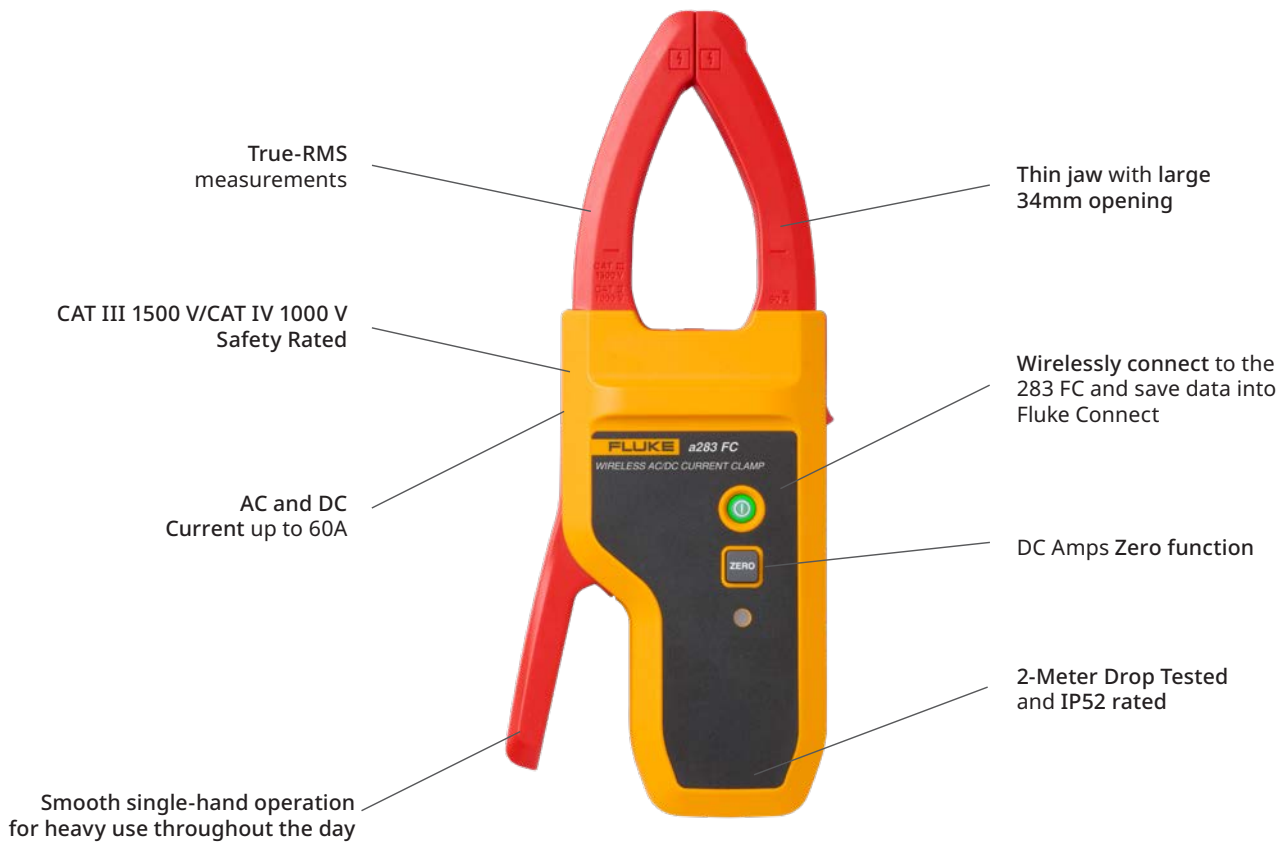

## Wireless Current Clamp

The a283 FC True-RMS wireless current clamp is designed to simplify the troubleshooting process without compromising on safety and reliability. It can measure both AC and DC current up to 60 A, ensuring precise and reliable readings for a wide range of applications including solar installations, electrical systems, and industrial equipment.

With its non-contact design, the clamp allows for safe connections without the need to touch live wires, enabling you to close the clamp in a cabinet and take measurements from a safe distance. It carries a CAT III 1500 V, CAT IV 1000 V rating that matches the safety rating of the 283 FC.

Wireless connectivity allows for convenient transmission of measurements, eliminating the hassle of tangled wires and allowing you to install the current clamp in an enclosure so you can safely measure at a distance. The clamp has a thin jaw design to ensure easy access to combiner boxes and tight spaces, enhancing overall efficiency in your measurement process.

## Voltage and Current at the same time

With the 283 FC digital multimeter and a283 FC wireless current clamp, you can measure voltage and current at the same time and automatically calculate VA power. This eliminates the hassle of having to change your measurement setup to capture both measurements and eliminates the need to manually calculate power in the field. Voltage and current are time-stamped, eliminating any concerns about potential disparities being caused by environmental factors. You can also view more than one measurement at a time allowing you to monitor additional parameters like DC amperage or voltage, giving you even more insights into system performance.

## Logging/Saving

The 283 FC offers convenient logging and saving features that set it apart from other digital multimeters. With a built-in real-time clock, each measurement can be time- and date-stamped for accurate recordkeeping. The multimeter has internal memory to save and log measurements, which can then be easily transferred to Fluke Connect for further analysis. Additionally, you have the flexibility to customize logging durations and intervals, ensuring the logging process matches the specific needs of the system you are testing.

## Fluke Connect™ with Fluke Cloud™ Storage

Fluke Connect™ compatibility provides convenient features to enhance your troubleshooting experience. As part of the Fluke Connect family, the 283 FC can transmit measurements to a smartphone or tablet for later, detailed analysis. No need to write down the results. Trend and monitor measurements live on your phone screen and upload those measurements to the cloud. Combine measurement data from multiple Fluke Connect test tools to create and share reports from the job site via email and collaborate in real time with other colleagues with ShareLive™ video calls or email. The table view feature organizes measurements, notes, and images in a clear and efficient manner, making it easier to reference data, identify issues, and generate reports for customers. Fluke Connect™ with Fluke Cloud™ Storage streamlines your workflow and ensures accurate data storage and organization.



## Specifications – 283 FC Digital Multimeter

Function	Range	Resolution	Accuracy
AC volts <sup>[1]</sup>	6.000 V	0.001 V	1.0 % + 3 (45 Hz to 500 Hz)
	60.00 V	0.01 V	
	600.0 V 1000 V	0.1 V 1 V	2.0 % + 3 (500 Hz to 1 kHz)
DC volts	6.000 V	0.001 V	0.09 % + 3
	60.00 V	0.01 V	
	600.0 V	0.1 V	
	1500 V	1 V	0.15 % + 2
DC mV	600.0 mV	0.1 mV	0.09 % + 2
AC mV <sup>[1]</sup>	600.0 mV	0.1 mV	1.0 % + 3 (45 Hz ~ 500 Hz) 2.0 % + 3 (500 Hz ~ 1000 Hz)
Continuity	600 Ω	1 Ω	
Resistance	600.0 Ω	0.1 Ω	0.5 % + 4
	6.000 kΩ	0.001 kΩ	
	60.00 kΩ	0.01 kΩ	
	600.0 kΩ	0.1 kΩ	
	6.000 MΩ	0.001 MΩ	
	50.00 MΩ	0.01 MΩ	1.5 % + 4
Capacitance	1000 nF	1 nF	1.2 % + 2
	10.00 μF	0.01 μF	
	100.0 μF	0.1 μF	
	9999 μF	1 μF	10 % typical
Frequency	99.99 Hz	0.01 Hz	0.1 % + 2
	999.9 Hz	0.1 Hz	
	9.999 kHz	0.001 kHz	
	99.99 kHz	0.01 kHz	
AC VA (45–500Hz) <sup>[1]</sup>	360.0 VA	0.1 VA	2 % + 1.0 VA
	3.600 kVA	0.001 kVA	2 % + 0.01 kVA
	36.00 kVA	0.01 kVA	2 % + 0.1 kVA
	60.00 kVA	0.01 kVA	2 % + 0.15 kVA
DC VA <sup>[1]</sup>	360.0 VA	0.1 VA	2 % + 1.0 VA
	3.600 kVA	0.001 kVA	2 % + 0.01 kVA
	36.00 kVA	0.01 kVA	2 % + 0.1 kVA
	90.00 kVA	0.01 kVA	2 % + 0.25 kVA
Min-max avg	For DC functions, accuracy is the specified accuracy of the measurement function ± 12 counts for changes longer than 350 ms in duration. For AC functions, accuracy is the specified accuracy of the measurement function ± 40 counts for changes longer than 900 ms in duration.		

<sup>[1]</sup>(<1 % range, unspecified)

## Specification – 283 FC Digital Multimeter Continued

Environmental specifications	
Operating temperature	-10 °C to 60 °C
Storage temperature	-30 °C to +70 °C
Humidity (without condensation)	0 % to 90 %, 10 °C to 30 °C
	0 % to 75 %, 30 °C to 40 °C
	0 % to 45 %, 40 °C to 60 °C
Warranty and Protection	
Electromagnetic compatibility	IEC 61326-1, IEC 61326-2-2, Portable, Group 1, Class A
Overvoltage category	CAT III 1500 V, CAT IV 1000 V
Agency approvals	ETL (AMER and EMEA), CSA (APAC), CE, UK CA
Drop test	2 meter (6.5 ft) drop test
Ingress protection	IP52
Warranty	Limited lifetime
Mechanical and general specifications	
Counts	6000
Size	22.5 cm x 10.5 cm x 5.7 cm (8.8 in x 4.1 in x 2.2 in)
Weight	0.7 kg (1.5 lb)
Battery life	> 150 hours typical, without backlight (Alkaline, 3 AA)
	> 100 hours typical when connected to wireless current clamp (Alkaline, 3 AA)



### Preventive Maintenance Simplified

Save time and improve the reliability of your maintenance data by wirelessly syncing measurements using the Fluke Connect system.

- **Eliminate data-entry errors** by saving measurements directly from the tool and associating them with the work order, report or asset record.
- **Maximize uptime** and make confident maintenance decisions with data you can trust and trace.
- **Move away from clipboards,** notebooks and multiple spreadsheets with a wireless one-step measurement transfer.
- **Access baseline,** historical and current measurements by asset.
- **Share your measurement data** using ShareLive™ video calls and emails. Visit the Fluke website to learn more about the Fluke Connect system.

Find out more at [fluke.com](http://fluke.com)



## Specifications – a283 FC Wireless Current Clamp

Function	Range	Resolution	Accuracy
AC current (True-RMS) <sup>[2]</sup>	60 A	0.01 A	1.5 % + 0.15 A, 45–500 Hz
DC current <sup>[2]</sup>	60 A	0.01 A	1.5 % + 0.15 A

### General specifications – Fluke a283 FC Wireless Current Clamp

Operating temperature	-10 °C to 60 °C
Storage temperature	-30 °C to +70 °C
Humidity (without condensation)	0 % to 90 %, 5 °C to 30 °C 0 % to 75 %, 30 °C to 40 °C 0 % to 45 %, 40 °C to 60 °C

### Warranty and Protection

Electromagnetic compatibility	IEC 61326-1, IEC 61326-2-2, Portable, Group 1, Class A
Overvoltage category	CAT III 1500 V, CAT IV 1000 V
Agency approvals	ETL (AMER and EMEA), CSA (APAC), CE, UK CA
Drop test	2 meter (6.5 ft) drop test
Ingress protection	IP52
Warranty	1-year

### Mechanical and general specifications

Size	22.6 cm x 9.1 cm x 4.2 cm (8.9 in x 3.6 in x 1.7 in)
Jaw opening	34 mm (1.34 in)
Weight	0.375 kg (13.2 oz)
Battery life	> 80 hours typical (Alkaline, 2 AAA)

### Features

LED indicator	Indicates wireless connection and data transmission status
Battery indicator	Indicates battery status
Power Key	Power On/Off
Zero Key	A DC zeroing function

<sup>[2]</sup> < 1 % range, unspecified

## Ordering information

FLUKE-283 FC/PV	Solar Kit with CAT III 1500 V, CAT IV 1000 V TRMS Wireless Multimeter and 60A AC/DC Wireless Current clamp
	<b>Includes</b> 283 FC TRMS Wireless Digital Multimeter, a283 FC 60A TRMS Wireless AC/DC Current Clamp, Solar MC4 test Lead set, TL175-HV TwistGuard™ Silicone test leads, Premium carrying case, TPAK magnetic hanging strap, Limited Lifetime Warranty on the Multimeter, 1-year warranty on the clamp
FLUKE-283 FC	CAT III 1500 V, CAT IV 1000 V TRMS Wireless Multimeter
	<b>Includes</b> 283 FC TRMS Wireless Digital Multimeter, TL175-HV TwistGuard™ Silicone test leads, Premium carrying case, TPAK magnetic hanging strap, Limited Lifetime Warranty
FLUKE-A283 FC	60A TRMS Wireless AC/DC Current Clamp
	<b>Includes</b> Wireless clamp for use with the Fluke 283 FC Multimeter, 1-year Warranty

## Accessories and replacement parts

a283 FC	CAT III 1500 V, CAT IV 1000 V Wireless clamp for use with the Fluke 283 FC Multimeter
TL175-HV	CAT III 1500 V, CAT IV 1000 V rated TwistGuard™ Silicone test leads
PVLEAD1	CAT III 1500 V Staubli MC4 TO 4MM test lead set, Black/Red
TPAK Magnetic Hanger	Magnetic meter hanging strap



**Fluke.** Keeping your world up and running.™

TECHNICAL DATA

# Fluke IRR1-SOL, IRR2-BT Solar Irradiance Meter, PV Site Surveyor



## HIGH PRECISION MONO-CRYSTALLINE SOLAR SENSOR

Instantaneous irradiance measurements up to 1400 W/m<sup>2</sup>

## TWO OPTIONS FOR TEMPERATURE MEASUREMENT

Use the built-in temperature sensor or the external suction mount temperature probe to measure ambient and panel temperature

## INTEGRATED COMPASS

Measure and document roof or site orientation

## INCLINATION SENSOR

Know roof and PV panel tilt when surveying, installing, or adjusting the installation

## MOUNTING SOLUTION

Ensure proper irradiance measurements with solar panel mounting, included with the IRR2-BT kit.

## INSTANT I-V CURVE READINGS

Part of the Fluke solution for I-V curve measurements, the IRR2-BT wirelessly communicates with the SMFT-1000 for instant and accurate readings.

**Make the critical measurements needed for installing, testing, maintaining, and reporting on solar panels or photovoltaic systems with one, easy-to-use tool.**

The Fluke IRR1-SOL and IRR2-BT Irradiance Meters have been designed from the ground up to simplify the installation, commissioning, and troubleshooting of photovoltaic arrays, measuring irradiance, temperature, inclination and direction of the solar array in a single handheld tool. With a rugged, compact design, a protective carrying case, and an easy-to-read, high-contrast LCD screen to read measurements in direct sunlight, these comprehensive PV site surveyors can go where you go. The simple user interface, instantaneous solar irradiation measurements and built-in temperature sensor make it easy to meet the IEC 62446-1 requirements for testing, documenting, and maintaining photovoltaic systems. Additionally, the integrated compass and inclination sensor allow you to quickly measure and document roof and site orientation, pitch, and panel tilt while surveying, installing, or adjusting an installation.

Whether working on a roof-mounted system or on a large field installation, Fluke Irradiance Meters are the single-handed solution that every solar installer and technician needs in their tool bag.

## Use the Fluke Irradiance Meters for:

### Photovoltaic system design and surveying

To find the expected production at a site, determine your solar resource while taking shading into account. The solar resource is measured in peak sun hours: the number of hours per day with 1,000 watts generated per square meter of solar array. Location, time of day, season, and weather conditions all influence peak sun hours. Determine the actual solar irradiance (Watts/m<sup>2</sup>) and shading at the site to develop a baseline.

### Measuring

Once your system is installed, make sure it is operating as designed by measuring its electrical characteristics and the actual power output of the array. The performance of a photovoltaic array is based on its current-voltage (I-V) curve. Use the irradiance meter to obtain the amount of solar irradiance necessary to calculate the I-V curve of the power output. The IRR2-BT features wireless communication of recorded irradiance and temperature measurements with the Fluke SMFT-1000 Solar Multifunction PV Analyzer to instantly determine the I-V curve of the panels under test.

Even when installed correctly, a photovoltaic system may not be producing the expected electrical output. In order to produce the expected output the system needs to receive the correct amount of irradiance energy to generate the DC voltage that is fed into the inverter.



**Specifications**

Irradiance	
Measuring Range	50 to 1400 W/m <sup>2</sup>
Resolution	1 W/m <sup>2</sup>
Measuring Accuracy	± (5 % + 5 Digit)
Temperature Measurement	
Measuring range (°C)	-30 °C to 100 °C (-22 °F to 212 °F)
Resolution	0.1 °C (0.2 °F / 1 °F @>100 °F)
Measuring Accuracy	±1 °C (±2 °F @) -10 °C to 75 °C (14 °F to 167 °F), ±2 °C (±4 °F @) -30 °C to -10 °C (-22 °F to 14 °F) and 75 °C to 100 °C (167 °F to 212 °F)
Note: Temperature measurement response time: ~30 sec.	
Inclination Angle	
Measuring Range	-90° to +90°
Resolution	0.1°
Measuring Accuracy	± 1.5°@ -50° to +50°, ±2.5° @ -85° to -50° and +50° to +85° ±3.5° @ -90° to -85° and +85° to +90°
Compass	
Measuring Range	0° to 360°
Resolution	1°
Measuring Accuracy	± 7°
Note: a) Measurements valid for device inclination between -20° and +20° to horizontal. Outside that range on LCD will be shown "----". b) Result is referred to magnetic north.	
Temperature	
Operating Temperature IRR1-SOL & IRR2-BT	-20 °C to 50 °C (-4 °F to 122 °F) (humidity <80 %), noncondensing
Operating Temperature 80PR-IRR	-30 °C to 100 °C (-22 °F to 212 °F)
Storage Temperature	-30 °C to 60 °C (-22 °F to 140 °F) (humidity <80 %)
Altitude	0 m to max. 2000 m
Wireless Radio Module (IRR2-BT only)	
Frequency Range	2.402 GHz to 2.480 GHz
Output Power	8 dBm
Memory (IRR2-BT only)	
Type	EEprom
Size (kB/records)	64 kB/6400
Recording Time	17 hours
RTC	Yes (super CAP supply)
Communication	BT: BL653 module (only with SMFT-1000)

**Specifications continued**

Electromagnetic Compatibility (EMC)	
International	IEC 61326-1: Portable Electromagnetic Environment CISPR 11: Group 1, Class A Group 1: Equipment has intentionally generated and/or uses conductively-coupled radio frequency energy that is necessary for radio frequency energy that is necessary for the internal function of the equipment itself. Class A: Equipment is suitable for use in all establishments other than domestic and those directly connected to a low voltage power supply network that supplies buildings used for domestic purposes. There may be potential difficulties in ensuring electromagnetic compatibility in other environments due to conducted and radiated disturbances. Caution: This equipment is not intended for use in residential environments and may not provide adequate protection to radio reception in such environments.
Korea (KCC)	Class A Equipment (Industrial Broadcasting & Communication Equipment) Class A: Equipment meets requirements for industrial electromagnetic wave equipment and the seller or user should take notice of it. This equipment is intended for use in business environments and not to be used in homes.
USA (FCC)	47 CFR 15 subpart B. This product is considered an exempt device per clause 15.103.
Protection	
IP Protection	IP40
Power Supply & Battery Life	
Batteries	4 AA Alkaline Batteries
Battery Life (typical)	50 hours (> 9000 readings)
Auto Power Off	30 minutes
Dimensions	
L x W x H	150 x 80 x 35 mm (5.90 x 3.14 x 1.37 in) 231 g (0.5 lb)
Weight	0.5 lb (231 g)

**Ordering information**

**Fluke IRR2-BT Solar Irradiance Meter Pro**

Includes: FLK-IRR2-BT Solar Irradiance Meter Pro, FLK- 80PR-IRR External Temperature Probe with Suction Cup, MB1-IRR Mounting Bracket, Carrying Case with Shoulder Strap, (4) AA Alkaline Batteries, User Manual.

**Fluke IRR1-SOL Solar Irradiance Meter**

Includes: FLK-IRR1-SOL Solar Irradiance Meter, FLK-80PR-IRR External Temperature Probe with Suction Cup, C250 Carrying Case with Shoulder Strap, (4) AA Alkaline Batteries, User Manual.

**Fluke.** *Keeping your world up and running.*

# TLPV1 MC4 to 4mm Test Lead Set



Ensures safe measurements on PV modules

Compatible with 4 mm sheathed banana plugs

Ideal for Staubli MC4-connected solar panels

Set of black and red MC4 to 4 mm banana plug test leads for solar applications, designed for reliable and safe measurements in photovoltaic systems.

## Key Features:

- **Safety and Reliability:** Ensures safe current and voltage measurements on photovoltaic (PV) modules and systems.
- **Versatile Connections:** Compatible with test tools accepting 4 mm sheathed banana plugs.
- **Measurement and Troubleshooting:**
  - Connects measuring devices to PV power plants.
  - Ideal for regular tests, measurements, and troubleshooting on solar PV panels that use Staubli MC4 connections.
- **Nickel Plated Contacts:** Ensures robust and reliable connections with minimal resistance and corrosion.
- **Lead Specifications:**
  - **Length:** The test leads are 150 cm (59 inches) long, providing ample reach for testing and measurements.
  - **Color Coding:** Includes a set of black (female) and red (male) MC4 test leads for easy identification and usage.
- **Official Staubli MC4 connectors used:** Ensuring high-quality and reliable connections.
- **Includes the Fluke TLPV-UTOOL solar PV unlocking tool:** For convenient disconnect of Staubli MC4 connectors.
- **Includes the Fluke LeadWrap:** For test lead management and storage.
- **Warranty:** One-year warranty.

**Applications:**

- **Photovoltaic (PV) Module and System Testing:** Ideal for performing safe and accurate current and voltage measurements on PV modules and systems.
- **PV Power Plant Connections:** Facilitates the connection of measuring devices to PV power plants, aiding in regular testing, maintenance, and troubleshooting.
- **Solar PV Panel Analysis:** Used in various diagnostic and maintenance tasks on solar PV panels that accept Staubli MC4 connections, ensuring efficient and reliable performance.
- **Test Equipment Compatibility:** Connects to a range of test tools that accept 4 mm sheathed banana plugs, making it versatile for different testing environments and requirements.
- **Field and Lab Testing:** Suitable for both on-site field testing and laboratory analysis, offering flexibility for different testing scenarios.

**Ratings**

<b>Voltage:</b>	Complies to IEC / EN 61010-031 CAT III 1500 V Do Not Disconnect Under Load Not Intended for Permanent Installation
<b>Current:</b>	30 A
<b>Temperature Range:</b>	+5 °C to +30 °C (+41 °F to +86 °F), < 80 % RH +31 °C to +40 °C (+88 °F to +104 °F), < 50 % RH



**Ordering Information**

TLPV1, MC4 TO 4mm TEST LEAD SET, BLACK/RED

**Fluke.** Keeping your world up and running.™

TECHNICAL DATA

# Fluke TLPV2 Solar Clamp Test Lead Set, Black/Red



## Key features

- Black and red MC4 test leads for accurate solar DC measurements.
- Designed for safe and precise DC measurements on PV systems.
- Nickel-plated contacts ensure long-lasting, reliable performance.
- Includes PV unlocking tool for easy connector disconnection.

## Product overview: Fluke TLPV2 Solar Clamp Test Lead Set, Black/Red

The TLPV2 Solar Clamp Test Lead Set is designed for professionals in solar energy, providing accurate and reliable DC power measurements for photovoltaic systems. Equipped with official Staubli MC4 connectors, the TLPV2 test leads ensure secure connections and optimal performance during testing, maintenance, and troubleshooting of solar installations.

This set includes black and red test leads specifically tailored for PV applications. The black lead features an MC4 (male) breakout to a 12-inch PV connector (female) and a 36-inch 4mm sheathed banana plug. The red lead complements this with an MC4 (female) breakout to a 12-inch PV connector (male) and a 36-inch 4mm sheathed banana plug. These leads are compatible with Solar Clamp Meters that accept 4mm sheathed banana plugs, such as the Fluke 393 FC Solar Clamp Meter, making them ideal for seamless integration with professional tools.

The TLPV2 set is essential for solar panel installation, inverter testing, and PV system diagnostics. It allows users to monitor and assess PV circuits accurately during operation, supporting energy audits and efficiency evaluations. With nickel-plated contacts, the leads offer durability and long insertion life, maintaining performance over time. A PV

unlocking tool is also included, providing a convenient solution for disconnecting Staubli MC4 connectors safely.

Rated for CAT III 1500V, the TLPV2 ensures safe and compliant measurements, enhancing user confidence in demanding solar environments. It is specifically engineered for non-permanent installations and not intended for use under load disconnection.

For solar professionals, the TLPV2 Solar Clamp Test Lead Set offers precision, safety, and compatibility, making it an indispensable addition to any solar technician's toolkit.

## Specifications: Fluke TLPV2 Solar Clamp Test Lead Set, Black/Red

Ratings	
Voltage	Complies to IEC/EN61010-031 CAT III 1500V Do Not Disconnect Under Load Not intended to use for Permanent Installation
Current	30A
Temperature Range	+5 °C to +30 °C (+41 °F to +86 °F), <80 % RH +31 °C to +40 °C (+88 °F to +104 °F), <50 % RH

## Ordering information



### TLPV2

Fluke TLPV2 Solar Clamp Test Lead Set, Black/Red

Part#: 5590605

---

MC4 Solar Power Clamp Set, Black/Red

---

**FLUKE®**