FLUKE®

53IIB/54IIB Thermometer

Users Manual

January 2011 © 2011 Fluke Corporation. All rights reserved. Specifications are subject to change without notice. All product names are trademarks of their respective companies.



LIMITED WARRANTY AND LIMITATION OF LIABILITY

This Fluke product will be free from defects in material and workmanship for three years from the date of purchase. This warranty does not cover fuses, disposable batteries, or damage from accident, neglect, misuse, alteration, contamination, or abnormal conditions of operation or handling. Resellers are not authorized to extend any other warranty on Fluke's behalf. To obtain service during the warranty period, contact your nearest Fluke authorized service center to obtain return authorization information, then send the product to that Service Center with a description of the problem. THIS WARRANTY IS YOUR ONLY REMEDY. NO OTHER WARRANTIES, SUCH AS FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSED OR IMPLIED. FLUKE IS NOT LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LOSSES, ARISING FROM ANY CAUSE OR THEORY. Since some states or countries do not allow the exclusion or limitation of an implied warranty or of incidental or consequential damages, this limitation of liability may not apply to you.

11/99



Table of Contents

Title F	Page
Safety Information	1
Contacting Fluke	1
Getting Started	
Components	5
Display Elements	6
Buttons	7
Using the Thermometer	9
Changing Setup Options	9
Entering and Exiting Setup	
Changing the Logging Interval	10
Changing the Thermocouple Type	11
Changing the Offset	11
Enabling or Disabling Sleep Mode	12
Setting the Time	
Changing the Line Frequency	

l



53IIB/54IIBUsers Manual

Measuring Temperatures	12
Connecting a Thermocouple	
Displaying Temperatures	
Holding the Displayed Temperatures	14
Viewing the MIN, MAX, and AVG Readings	14
Using the Offset to Adjust for Probe Errors	
Using Memory	15
Initial Conditions and Data Entries	16
Starting and Stopping Logging	16
Clearing Memory	17
Viewing Logged Readings	17
Communicating with a PC	18
Maintenance	19
Replacing the Batteries	19
Cleaning the Case and Holster	
Calibration	
Specifications	19
Environmental	
80 PK-1 Thermocouple (supplied with thermometer)	20
Electrical	
Replacement Parts and Accessories	21

ii



Safety Information

The Fluke 53IIB and 54IIB Thermometers ("the thermometer") are microprocessor-based, digital thermometers designed to use external J-, K-, T-, E-, R-, S-, and N-type thermocouples (temperature probes) as temperature sensors.

Use the thermometer only as specified in this manual. Otherwise, the protection provided by the meter may be impaired.

Refer to safety information in Table 1 and the meter symbols in Table 2.



Table 1. Safety Information

Marning

A Warning identifies conditions and actions that pose hazards to the user. To avoid electrical shock or personal injury, follow these guidelines:

- Before using the thermometer inspect the case. Do not use the thermometer if it appears damaged. Look for cracks or missing plastic. Pay particular attention to the insulation around the connectors.
- Disconnect the thermocouple(s) from the thermometer before opening the case.
- Replace the batteries as soon as the battery indicator (appears. The possibility of false readings can lead to personal injury.
- Do not use the thermometer if it operates abnormally. Protection may be impaired. When in doubt, have the thermometer serviced.
- Reflective objects result in lower than actual temperature measurements. These objects pose a burn hazard.
- Do not operate the thermometer around explosive gas, vapor, or dust.
- Do not connect to voltages > 30 V ac rms, 42 V pk, 60 V dc from earth ground.



Table 1. Safety Information (cont.)

- Model 54: Measurement errors may occur if voltages on the measurement surfaces result in potentials greater than 1 V between the two thermocouples. When potential differences are anticipated between the thermocouples, use electrically insulated thermocouples.
- When servicing the thermometer, use only specified replacement parts.
- Do not use the thermometer with any part of the case or cover removed.

Caution

A Caution identifies conditions and actions that may damage the meter or the equipment under test.

- Use the proper thermocouples, function, and range for your thermometer.
- Do not attempt to recharge the batteries.
- To prevent explosion, do not throw batteries into a fire.
- Follow local laws or regulations when disposing of batteries.
- Match the + and polarities of the battery with the battery case.



Users Manual

Table 2. International Symbols

<u> </u>	Refer to the manual for information about this feature.	CE	Complies with European Union directives.
Œ	Battery.	® us	Complies with relevant Canadian Standards Association directives.

Getting Started

Everything in this *Users Manual* applies both to Models 53 and 54 unless otherwise indicated.

To become familiar with the thermometer, study the following:

- Figure 1 and Table 3 describe the components.
- Figure 2 and Table 4 describe the display.
- Table 5 describes the functions of the buttons.

Then read the following sections.

Components

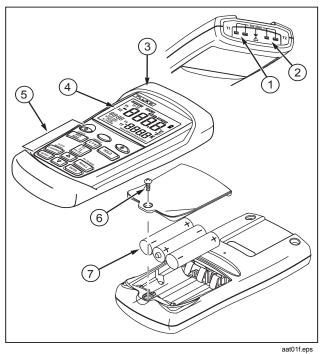


Figure 1. Components

Table 3. Components

1	Thermocouple T1 input
2	Model 54: Thermocouple T2 input
3	Holster
4	Display
(5)	Buttons
6	Battery door
7	Batteries

Display Elements

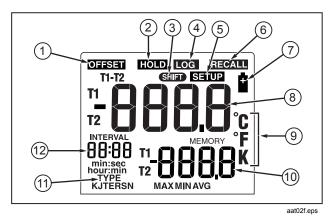


Figure 2. Display Elements

Table 4. Display Elements

1	The thermocouple measurement includes an offset. See "Changing Setup Options."
2	The displayed readings do not change.
3	A shift function is in progress.
4	Readings are being logged.
(5)	Setup is in progress.
6	Logged readings are displayed.
7	Low battery. Replace the batteries.
8	Primary Display. <i>Model 53:</i> T1 reading. <i>Model 54</i> T1, T2, or T1-T2 reading.
9	The temperature units.
10	Secondary Display: MAX, MIN, AVG, MEMORY, or offset. <i>Model 54:</i> T1 or T2 reading.
(1)	The thermocouple type.
12	Time Display: 24-hour clock. Shows the INTERVAL length in SETUP. Shows elapsed time when AVG is on or before clock has been set.

Buttons

Table 5. Buttons

0	Press ① to turn the thermometer on or off.
	Press , MIN (CANCEL) to stop displaying the minimum, maximum, and average readings in the
(Shift function)	secondary display.
	Press , [CLEAR MEMORY] to delete logged readings from memory.
	Press , [RECALL] (PC/IR SEND) to toggle the IR port on and off.
*	Press 🏵 to turn the backlight on and off. The backlight turns off after 2 minutes without any button presses. If the battery is low, the backlight is disabled.
MIN	Press MIN to step through the maximum, minimum, and average readings.
	When viewing logged readings, shows the maximum, minimum, and average of the logged readings.
	Press , MIN (CANCEL) to turn off this display.
°C °F K	Press [UFK] to switch between Celsius (°C), Fahrenheit (°F), and Kelvin (K).



Table 5. Buttons (cont.)

HOLD	Press HOLD to freeze or unfreeze the displayed readings.
	Press HOLD when turning on the thermometer to test the display. All display elements appear.
T1 12 11.172	Model 54: Press [17] to toggle showing the T1, T2, and T1-T2 (differential temperature measurement) in the primary or secondary display.
SETUP	Press serup to start or exit Setup. (See "Changing Setup Options.")
Δ	Press 🛆 to scroll to the Setup option you want to change.
	Press (a) to increase the displayed setting.
abla	Press v to scroll to the Setup option you want to change.
	Press v to decrease the displayed setting.
ENTER	Press ENTER to enter a Setup option.
	Press enter again to store the displayed setting in memory.
LOGGING	Press Located to start or stop logging.
	During manual logging, the thermometer stores a single set of logged readings in memory each time you press [DOGING].
RECALL	Press RECALL to show logged readings and MIN MAX readings on the display.
	Press RECALL again to stop.



Using the Thermometer

- 1. Plug the thermocouple(s) into the input connector(s).
- 2. Press to turn on the thermometer.

After 1 second the thermometer displays the first reading. If no thermocouple is plugged into the selected input or the thermocouple is "open," the display shows:

"- - - -."

Changing Setup Options

Use Setup to change the logging interval, thermocouple type, offset, sleep mode, time, and line frequency settings.

The thermometer stores the settings in its memory. Setup settings reset only when the batteries are removed for more than 2 minutes.

Entering and Exiting Setup

When the thermometer is in Setup mode, the display shows SETUP.

Press SETUP to start or exit Setup.

Notes

Press
or
to scroll to the setup option you want to change.

Setup is disabled in MIN MAX mode.



Users Manual

Changing the Logging Interval

The logging interval determines how often the thermometer stores logged readings in memory. You choose the length of the logging interval. See "Using Memory."

The thermometer stores logged readings at the end of each logging interval. You can select a logging interval of 1 second (1), 10 seconds (2), 1 minute (3), 10 minutes (4), or user-defined (USEr).

You can also set the logging interval manually (**0**). Each time you press [LOGGING], the thermometer stores the current readings in memory.

- 1. Press △ or ▽ until the display shows **INTERVAL**.
- 2. Press to display the logging interval choices.
- 3. Press △ or ▽ until the display shows the logging interval you want, and then press enter to select.

- 4. If you selected a user-defined logging interval:
 - Press
 or
 until the display shows
 hour:min or min:sec, and then press
 enter to select.

The left two digits blink.

The right two digits blink.

Holding down \triangle or ∇ causes the number to change more quickly.

Changing the Thermocouple Type

- 1. Press △ or ▽ until the display shows **TYPE**.
- Press [INTER] to display the thermocouple type choices.
 The currently selected thermocouple blinks.
- 3. Press △ or ▽ until the thermocouple you want appears on the display.
- 4. Press to store the thermocouple type in memory.

Changing the Offset

You can adjust the thermometer's readings to compensate for the errors of a specific thermocouple. See "Using the Offset to Adjust for Probe Errors." The allowable adjustment range is ± 5.0 °C or K, and ± 9.0 °F.

Model 54: You can store individual offsets for T1 and T2.

- Press △ or ▽ until the display shows **□** and T1 or T2.
- Press even to indicate that you want to change the offset setting.

The temperature measurement plus the offset appears in the primary display. The offset appears in the secondary display.

- 3. Press △ or ▽ until the primary display shows the correct reading.
- 4. Press enter to store the offset setting in memory.

Remember to reset the offset to 0.0 when it is no longer needed. The offset automatically resets to 0.0 when you change the thermocouple type.



Users Manual

Enabling or Disabling Sleep Mode

The thermometer enters sleep mode if no button press occurs for 20 minutes.

Pressing any button wakes the thermometer and returns it to its previous state.

- Press △ or ▽ until the display shows ¶P.
- Press enter to indicate that you want to change the sleep setting.

The display shows **on** if sleep mode is on and **OFF** if sleep mode is off.

- Press △ or ▽ as needed until the display shows on or OFF.
- 4. Press [ENTER] to store the sleep setting in memory.

Sleep mode is enabled each time you turn on the thermometer and is automatically disabled in MIN MAX and logging modes.

Setting the Time

- 1. Press △ or ▽ until the display shows the time if it is set or shows "- : -."
- 2. Press to indicate you want to set the time.

The left two digits blink.

Press
 or
 until the display shows the correct hour (24-hour format), and then press
 level to select.

The right two digits blink.

4. Press \(\triangle \) or \(\triangle \) until the display shows the correct minutes, and then press \(\triangle \) to store the time in memory.

Note

Holding down riangle or riangle causes the number to change more quickly.

Changing the Line Frequency

For optimum rejection of line noise, set the thermometer for the local line frequency as follows:

- 1. Press △ or ▽ until the display shows L . nf.
- 2. Press to indicate that you want to change the line setting.
- 3. Press \triangle or ∇ as needed until the display shows 50 H or 60 H (50 Hz or 60 Hz).
- 4. Press enter to store the line setting in memory.

Measuring Temperatures

Connecting a Thermocouple

Thermocouples are color coded by type based on the North American ANSI Color Code:

Туре	Color	Туре	Color
J	Black	R	Green
K	Yellow	S	Green
Т	Blue	N	Orange
E	Purple		

- 1. Plug a thermocouple into the input connector(s).
- Set the thermometer for the correct thermocouple type.

To change the thermocouple type, see "Changing Setup Options."



Users Manual

Displaying Temperatures

- 1. Press [TFK] to select the correct temperature scale.
- Hold or attach the thermocouple(s) to the measurement location.

The temperature reading appears in the selected display.

Model 54: Press (1,1,2,2) to toggle between showing the T1, T2, and T1-T2 reading in the primary or secondary display.

Notes

The display shows "- - - -" when a thermocouple is not connected.

The display shows **QL** (overload) when the temperature being measured is outside the thermocouple's valid range.

Model 54: If only thermocouple T2 is connected, the T2 reading appears in the primary display.

Holding the Displayed Temperatures

- Press HOLD to freeze the readings on the display.
 The display shows HOLD.
- 2. *Model 54:* Press [1] to toggle showing the T1, T2, or T1-T2 readings in the primary or secondary display.
- 3. Press HOLD again to turn off the HOLD function.

Viewing the MIN, MAX, and AVG Readings

 Press MIN to step through the maximum (MAX), minimum (MIN), or the average (AVG) readings.

The elapsed time since entering MIN MAX mode, or the time at which the minimum or maximum occurred, appears on the display.

2. Press , (CANCEL) to exit MIN MAX mode.

Using the Offset to Adjust for Probe Errors

Use the offset option in Setup to adjust the thermometer's readings to compensate for the errors of a specific thermocouple.

- 1. Plug the thermocouple into the input connector.
- Place the thermocouple in a known, stable temperature environment (such as an ice bath or a dry well calibrator).
- 3. Allow the readings to stabilize.
- In Setup change the offset until the primary display reading matches the calibration temperature. (See "Changing Setup Options.")

Using Memory

During a logging session the thermometer stores logged readings in its memory.

At the end of the logging session you can view the logged readings on the display.

You can also transfer the logged readings to a PC running FlukeView Forms software. (See "Communicating with a PC.")

FlukeView Forms displays the logged readings on an online form, which you can print or store for later use.



Users Manual

Initial Conditions and Data Entries

Logged readings include initial conditions and data entries.

The initial conditions are the thermocouple type and the offsets for each thermocouple input. You can only view initial conditions using *FlukeView Forms*.

The data entries are a time stamp, the T1 reading, and the T2 and T1-T2 readings (Model 54). You can view these values by pressing RECALL or using FlukeView Forms. Temperature readings display 0.1 degree resolution in FlukeView Forms.

The thermometer has 500 memory locations. The thermometer stores 499 sets of temperature readings and one set of initial conditions when logging continuously. It stores 250 sets of temperature readings and 250 sets of initial conditions when logging individual points manually.

Starting and Stopping Logging

Setup, memory clear, and PC communications are inaccessible during logging.

- Set the logging interval. (See "Changing Setup Options.")
- 2. Press Logging to start logging.

The display shows LOG.

- 3. Press Logging again to stop logging.
- 4. If you selected a manual logging interval, press each time you want to store logged readings in memory.



Clearing Memory

When memory is full, FULL appears on the display and logging stops. You can clear memory in normal or MIN MAX mode.

 Press , LOGGING (CLEAR MEMORY) to delete logged readings from memory.

The display shows the following for 2 seconds.




Viewing Logged Readings

1. Press RECALL to view logged readings.

The display shows RECALL.

2. Press △ or ▽ to scroll through the logged readings.

The display shows each logged reading, its time stamp, and its memory location. For example, Figure 3 shows the logged reading stored at 2:02 PM in memory location 18.

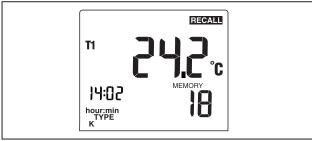


aat03f.eps

Figure 3. Logged Reading



Users Manual

3. Press MN to step through the minimum, maximum, average, and current logged reading. For example, Figure 4 shows the maximum reading in memory. The maximum reading occurred at 1:49 P.M. and was stored in memory location 5.

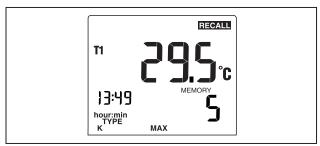

aat04f.eps

Figure 4. Maximum Reading

4. Press RECALL to stop viewing logged readings.

Note

The thermometer calculates the minimum and maximum of all logging sessions in memory.

The display shows "- - : - -" if the log is empty.

Communicating with a PC

You can transfer the contents of the thermometer's memory to a PC using *FlukeView Forms*. The communication requires an IR (infrared) serial connection. Refer to the *FlukeView Forms Installation Guide* and *FlukeView* Help.

FlukeView Forms places the logged readings into standard (default) or customized forms. The forms also display user comments. You can use these forms to satisfy ISO-9000 documentation requirements.

When you send logged readings to a PC, all functions are disabled except power off, backlight, and turning off communication.

 Press , RECALL (PC/IR SEND) to toggle the IR port on and off.

The display shows:

SEnd

When the IR port is enabled you can communicate with FlukeView Forms.

Maintenance

Replacing the Batteries

Refer to the safety information in Table 1 before replacing the batteries.

- 1. Turn off the thermometer if necessary.
- 2. Loosen the screw and remove the battery door.
- 3. Replace the three AA batteries.
- 4. Replace the battery door and tighten the screw.

Cleaning the Case and Holster

Use soap and water or a mild commercial cleaner.

Wipe with a damp sponge or soft rag.

Calibration

To ensure that the thermometer performs to its accuracy specifications, Fluke recommends that you calibrate the thermometer annually, starting one year after purchase.

To calibrate the thermometer, contact Fluke for the Service Center nearest you or follow the calibration procedure in the service manual listed in "Replacement Parts and Accessories."

Specifications

Environmental

Operating	-10 °C to 50 °C
Temperature	(14 °F to 122 °F)
Storage	-40 °C to +60 °C
Temperature	(-40 °F to +140 °F)
Humidity	Non condensing <10 °C (<50 °F) 95 % RH: 10 °C to 30 °C (50 °F to 86 °F) 75 % RH: 30 °C to 40 °C (86 °F to 104 °F) 45 % RH: 40 °C to 50 °C (104 °F to 122 °F)



Users Manual

General

Weight	280 g (10 oz)
Dimensions (without holster)	2.8 cm \times 7.8 cm \times 16.2 cm (1.1 in \times 3 in \times 6.4 in)
Battery	3 AA batteries
Certification	C€, ∰ _{∪s}
Safety	CAN/CSA C22.2 No. 61010-1-04, ANSI/UL 61010-1:2004, EN/IEC 61010-1:2001
ЕМС	EN/IEC 61326-1:2006
CATI	OVERVOLTAGE (Installation) CATEGORY I, Pollution Degree 2 per IEC1010-1*
. 5	

^{*} Refers to the level of Impulse Withstand Voltage protection provided. Category 1 products should not be attached to mains circuits.

80 PK-1 Thermocouple (supplied with thermometer)

Туре	Type K, Chromel Alumel, bead style
Temperature Range	-40 °C to +260 °C (-40 °F to +500 °F)
Accuracy	±1.1 °C (±2.0 °F)

Electrical

Measurement Range	J-type: -210 °C to +1200 °C (-346 °F to +2192 °F)
	K-type: -200 °C to +1372 °C (-328 °F to +2501 °F)
	T-type: -250 °C to +400 °C (-418 °F to +752 °F)
	E-type: -150 °C to +1000 °C (-238 °F to +1832 °F)
	N-type: -200 °C to +1300 °C (-328 °F to +2372 °F)
	R- and S-type: 0 °C to +1767 °C (+32 °F to +3212 °F)
Display Resolution	0.1 °C / °F / K <1000° 1.0 °C / °F / K ≥1000°



Electrical (cont.)

Electrical (cont.)		
Measurement Accuracy, T1, T2, or T1-T2 (Model 54)	J-, K-, T-, E-, and N-type: \pm [0.05 % of reading + 0.3 °C (0.5 °F)] [below -100 °C (-148 °F): add 0.15 % of reading for J-, K-, E-, and N-type; and 0.45 % of reading for T-type] R- and S-type: \pm [0.05 % of reading +0.4 °C (0.7 °F)]	
Temperature Coefficient	0.01 % reading + 0.03 °C per °C (0.05 °F per °F) outside the specified +18 °C to 28 °C (+64 °F to +82 °F) range [below -100 °C -148 °F): add 0.04 % of reading for J-, K-, E-, and N-type; and 0.08 % of reading for T-type]	
Electromagnetic Compatibility	Susceptibility: ±2 °C (±3.6 °F) for 80 MHz to 200 MHz in 1.5 V/m field, for 200 MHz to 1000 MHz in 3 V/m field. Emmisions: Commercial Limits per EN50081-1	
Maximum Differential Common Mode Voltage	1 V (Maximum voltage difference between T1 and T2)	
Temperature Scale	ITS-90	

Applicable	NIST-175	
Standards		
Accuracy is specified for ambient temperatures between 18 °C (64 °F) and 28 °C (82 °F) for a period of 1 year. The above		
specifications do not include thermocouple error.		

Replacement Parts and Accessories

Accessory	Part Number
Holster and Flex Stand™ Assembly	1272438
AA NEDA 15A IEC LR6 batteries	376756
80PK-1 K-Type Bead Thermocouple	773135
CD-ROM	1276106
Service Manual	1276123
FlukeView Forms	FVF-SC2

